




## Capstar Cap Feeder

Designed Primarily for Cap Orienting/Singulating

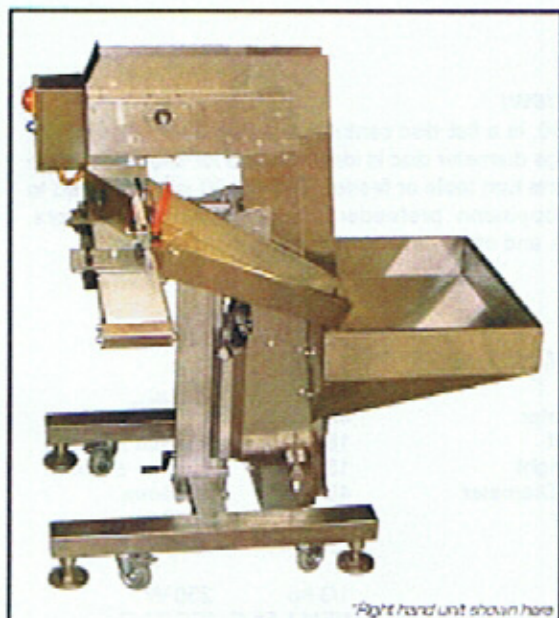

\*Right hand unit shown here

### Product Overview:

Hoppmann's Capstar cap feeder is designed and engineered to feed and orient flat screw caps, tamper evident caps and other minimal featured products at speeds ranging from 40 to 600 parts per minute. Changeover from one cap to another takes less than five (5) minutes.

### Product Specifications:

|                              | ANSI          | Metric      |
|------------------------------|---------------|-------------|
| A. Overall Height            | 65.13"-81.13" | 1655-2060mm |
| B. Load Height               | 35.75"-51.73" | 908- 314mm  |
| C. Discharge Height          | 46.22"-62.20" | 1174-1580mm |
| D. Overall Length            | 60.47"        | 1536mm      |
| E. Overall Width             | 54.00"        | 1371mm      |
| F. Belt Width                | 6.00"         | 152mm       |
| G. Conveyor Belt Center Line | 7.00"         | 178mm       |

### Standard Models:


| Part Number                  | Right Hand | Left Hand  |
|------------------------------|------------|------------|
|                              | FCCPSTRDSA | FCCPSTRDSA |
| Motor Style                  | DC         | DC         |
| Horsepower - Horizontal Belt | 1/8 hp     | 1/8 hp     |
| Horsepower - Elevator Belt   | 1/5 hp     | 1/5 hp     |
| Motor Voltage                | 90 VDC     | 90 VDC     |

### Standard Features:

- Polypropylene modular plastic belt
- Manually adjustable discharge height
- FDA approved white urethane cover continuous belt
- No tool changeover
- Small footprint
- Mounted encased controller
- Hopper agitator
- Casters and fixed feet

### Available Options:

- Elevator extensions
- Continuous welded hopper seams
- Elevator/hopper covers
- Washdown motors

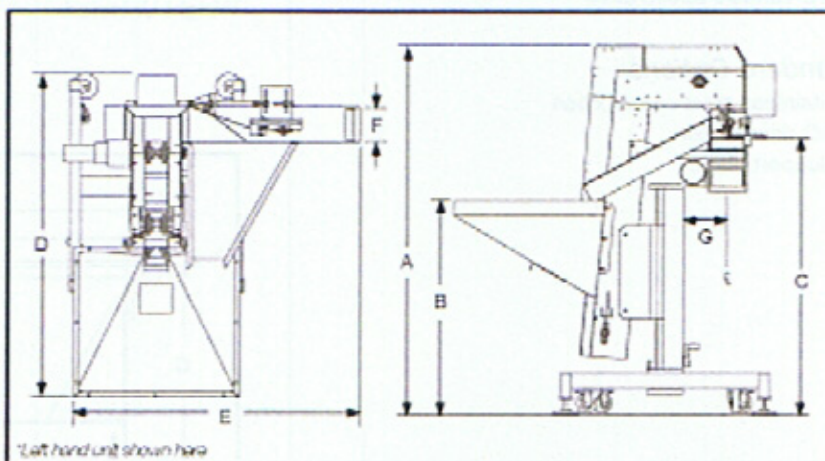

\*Left hand unit shown here

Hoppmann Corporation strives to improve its products and reserves the right to change or discontinue specifications & designs shown in this brochure without notice and without incurring obligation. 08.05

## Fujicon Engineering Pte Ltd

◆ No. 2, Tuas Link 1, Jurong Industrial Estate, Singapore 638590  
◆ Tel: (65) 6863 4011 ◆ Fax: (65) 6863 4022 ◆ Email: info@fujicon.com.sg  
[www.fujicon.com.sg](http://www.fujicon.com.sg)