



## FL-110 Linear Feeder

Designed for Multiple Bottle Applications



*\*Linear feeder with left hand exit shown.*

### Product Overview:

Hoppmann's FL-110 is designed to economically unscramble a wide variety of bottle applications. Delivery rates vary from slow to moderate speeds depending on application. The linear feeder features snap-in/snap-out vanes for quick and easy changeover - no tools needed. The FL-110 is standard with an integral Hoppmann prefeeder and discharge/exit conveyor.

### Product Specifications:

	ANSI
A Overall Height	100" ± 2"
B Discharge Height	36" ± 2"
C Overall Length	175"
D Overall Width	105"
E Hopper Load Height	48.25" ± 2"

### Standard Models:


Part Number	FL13RXXQYA (Right Hand Exit)	FL13LXXQYA (Left Hand Exit)
Motor Style	DC	DC
Motor Voltage	90V	90V
Horsepower	3/4 hp	3/4 hp
Weight Untooled	1700 lbs	1700 lbs
Supply Hopper Capacity	40 ft <sup>3</sup>	40 ft <sup>3</sup>

### Standard Features:

- Powered recirculating conveyor
- Quick change tooling
- Bulk storage hopper
- Stainless steel pre-orientation chute
- Mechanically timed outfeed conveyor
- Steel-It finish
- Polycarbonate covers
- Manual conveyor advance wheel
- Air clutch drive protection

### Available Options:

- Powered singulation belt wiper
- Puck system
- Air rinsing
- AC Motor

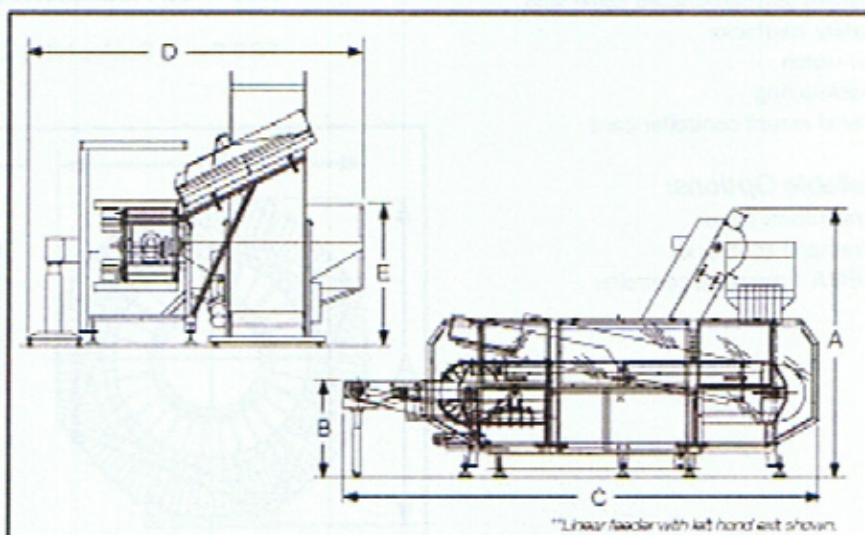

*\*Linear feeder with left hand exit shown.*

Hoppmann Corporation strives to improve its products and reserves the right to change or discontinue specifications & designs shown in this brochure without notice and without incurring obligation. 05/05

## Fujicon Engineering Pte Ltd

◆ No. 2, Tuas Link 1, Jurong Industrial Estate, Singapore 638590  
◆ Tel: (65) 6863 4011 ◆ Fax: (65) 6863 4022 ◆ Email: [info@fujicon.com.sg](mailto:info@fujicon.com.sg)  
[www.fujicon.com.sg](http://www.fujicon.com.sg)